


Parameter

| Audio, Video, and Image | |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Microphone | 3 mics. Dual-microphone noise suppression |
| Speaker | Rated power: 1W, Max: 2.5W |
| Video Shooting | 30fps |
| Video and Image Format | H.263, P0, H.264, BP/MP/HP, MPEG-4, SP/ASP, DivX, 4x/5x/6x, VP8, VP9, H.265 JPG, GIF, BMP, PNG, WEBP |
| Audio Format | Mp3, aacPlus, eAAC, AMR-NB, AMR-WB, G.711, Windows Media Audio, (WMA) 9/10 Pro |
| Environmental Standard | |
| Operating Temperature | -20℃ ~+60℃ |
| Storage Temperature | -30℃ ~+70℃ |
| Environmental Protection Requirement | RoHS/REACH |
| ESD | IEC 61000-4-2 (level 4); ±8 kV (contact discharge); ±12 kV (air discharge) |
| Dust and Water Proof | IP68 |
| Anti-fall | 1.2m |
| Moisture Resistance | MIL-STD-810 G |
| Shock and Vibration | MIL-STD-810 G |
| Certification | |
| Certification | China: CTA/SRRC (model certification)/CCC/IP68 Oversea: CE/FCC/U.S. military standard/IP68 Battery: CB certification/CQC/UN3803 Carrier authentication: Only technical support is provided. |

Standard Accessories



Optional Accessories

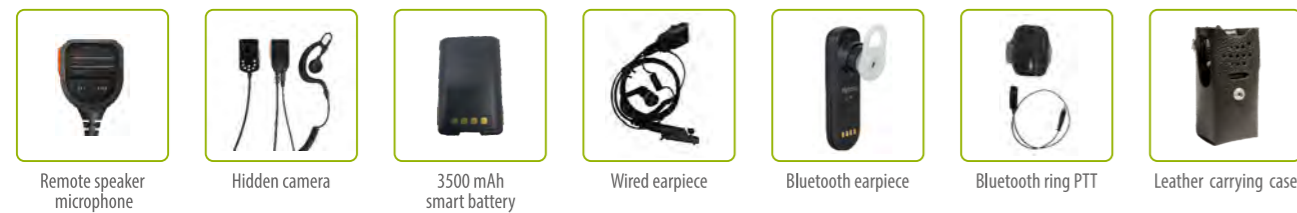

PDC550

Dual-mode Smart Radio

- DMR Conventional + LTE
- Mission Critical Interactive Design
- Loud and Clear Voice Quality
- Reliable & Rugged Design



Hytera Communications Corporation Limited
Stock Code: 002583.SZ

Address: Hytera Tower, Shenzhen Hi-Tech Industrial Park North, Beihuan RD.9108#, Nanshan District, Shenzhen, P.R.C.
Tel: +86-755-2697 2999 **Fax:** +86-755-8613 7139 **Post:** 518057
Http: //www.hytera.com **marketing@hytera.com**



Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

HYT, Hytera are registered trademarks of Hytera Communications Corp., Ltd.
© 2017 Hytera Communications Corp., Ltd. All Rights Reserved.



Hytera PDC550 Dual-mode Smart Radio



Broadband and narrowband convergence

PDC550 enables the collaboration of multiple communication modes including broadband and narrowband networks as well as public and private networks in multiple scenarios. Users can not only hear but also see clearly. So they can calmly respond, control the situation, and make decisions in the shortest time.



Rugged and Compact Design

With exquisite structural technology, IP68, military standard (MIL-STD-810 G), 1.2m drop-proof design, PDC550 has no fear for kinds of harsh environment.



Open platform providing infinities

PDC550 provides high compatibility and security performance. Multiple applications can run on it. Open API allows third party developing customized applications such as QR code recognition, facial recognition and license plate recognition.



Loud and clear voice quality

With the dual mic noise suppression technology and its powerful voice recognition function, human voice in noisy environment can be extracted effectively. Built-in 1W (up to 2.5W) speaker provides loud and clear audio quality for versatile voice service.



Friendly design

The 5-inch industrial-grade HD touch screen adopts the third-generation glass of Corning Gorilla Glass. It is visible even under strong light. The multi-touch screen can be touched even with gloves on and in rain. The back holding design and side anti-slip texture conform to ergonomics principles, ensuring more friendly and smooth operation.



Multiple protection mechanisms ensuring security


Communication security: The TF card slot design is used for communication and hardware encryption.
Application security: The radio uses professional MDM management software that can remotely control 100% terminal applications. All applications must complete signature authentication before uploaded to MDM, to eliminate malicious codes.

HyTalk

HyTalk, centering on the Push-to-Talk over Cellular (POC) service, is a public network PTT communication solution that provides PTT, full-duplex audio and video communication, and IM to meet requirements for different communication priorities. It also provides a complete set of clients, servers, and management platforms, to cover all service scenarios. This solution supports multiple communication modes, and has the advantages of high-quality communication, ease of deployment, economy, and security.

Multiple deployment modes are available for this solution. It can be deployed privately or operated as a public cloud, and can be deployed on various terminals. Its flexibility and ease of use can help customers rapidly solve video transmission problems.

Mobile Clients

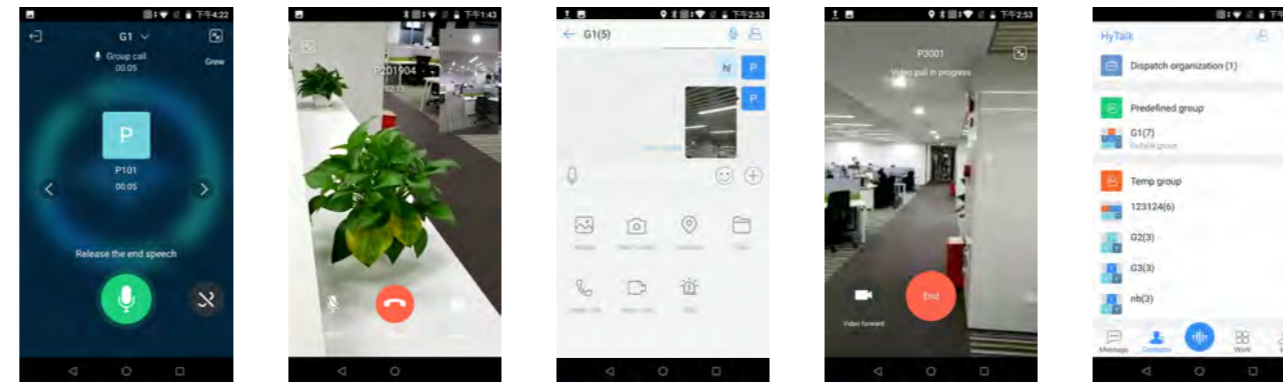

Audio PTT



Audio and video conference



Instant message



Video dispatch



Contacts book

Dispatch Station



GIS visualized dispatch

Through the position service, you can view terminal users' positions and tracks in real time, and perform map-based fast dispatch by using region selection calling and e-fence.


Common dispatch

Perform real-time common voice dispatch on all managed users and groups to implement fast grouping, group dismissing, following, listening, group call, audio and video call, IM, address book, and call log.

Video dispatch

Perform operations on terminal users' videos to implement real-time video pull, forcible pull, forwarding, environmental monitoring, and video push.

Applicable Industries

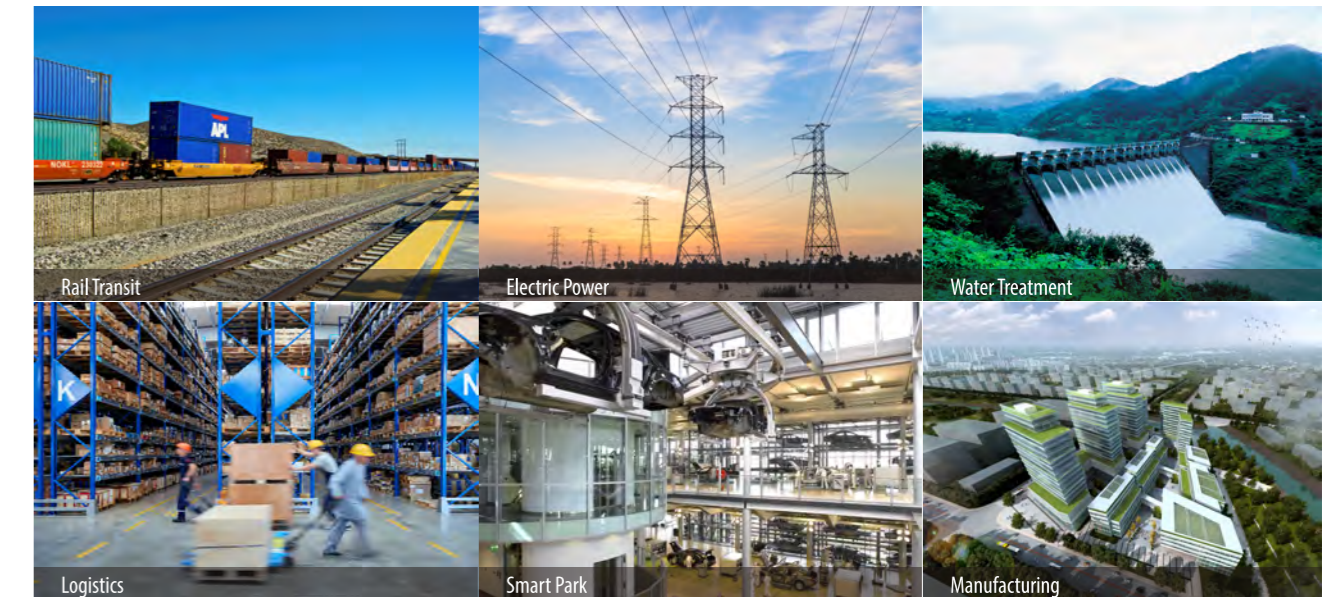

Parameter

| Network | | Hardware | |
|----------------|-----------------------------------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------|
| DMR Network | UHF:400-470MHz | Memory | 3 GB RAM + 32 GB ROM , expandable memory (maximum 128 GB) |
| Public Network | Europe & Asia-Pacific & Africa & South Korea: | Dimensions | 155 mm x 75 mm x 21.5 mm |
| | GSM: 850/900/1800/1900 | Weight | 375 g (including battery, antenna, and back clip) |
| | TD-SCDMA: B34/B39 | Screen | 5.0-inch HD touch screen, 1280x720 resolution |
| | CDMA: BCO | Cameras | Rear 13 mega-pixel camera + front 5 mega-pixel camera |
| | WCDMA: B1/B3/B5/B8 | Card Slots | 3, 2*Nano SIM card slot, 1*Micro SD card slot |
| | TDD-LTE: B38/B39/B40/B41 | WLAN | 2.4 GHz, 802.11b/g/n |
| | FDD-LTE: B1/B3/B5/B7/B8/B20/B26/B27/B28 | Sensors | Gravity sensor, compass, distance sensor, optical sensor |
| | | Locating | GPS/AGPS/GLONASS/Galileo/BeiDou (shared for broadband and narrowband networks) |
| | | Bluetooth | BT 4.1 (shared for broadband and narrowband networks) |
| | | NFC | Available(Payment is not supported) |
| | | External Interfaces | Hytera dedicated 13-pin interface, Charging interface for charger, Antenna interface (SMA interface, shared with Tds) |
| | | Key | 5: 1*PTT, 2*programmable key, 1*alarm key, 1*power key |
| | | Battery | Standard 2400 mAh/optional 3500 mAh, 7.4V |
| | | Charging Mode | Charging with charger, 2 A charging |
| | | Flashlight | Available |
| | | Volume Knob | Available (shared with the channel knob) |
| | | TX Power | UHF: High power 4W/Low power 1W |